


## 42/06-AS



### Application :

- Conveyor belt
- Dryer belt
- Filter

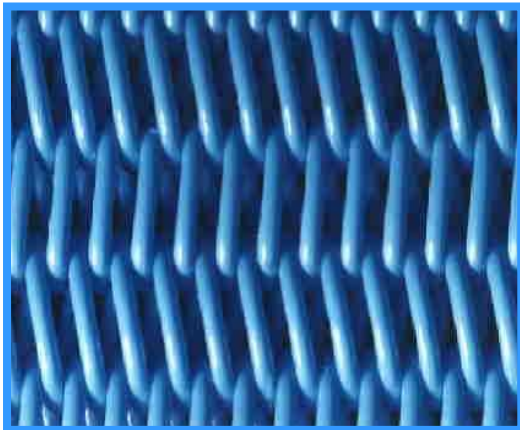

### Characteristics:

- good resistance to plugging
- high rate of evaporation
- very safe guiding conditions



# Specifications

## Technical data:

- Spiral fabric - 290 Spirals/m
- Spiral - PET\_teflon coated monofil 0,6 mm
- Pintle wire - PET monofil 0,6 mm
- Edge sealing - heat resistance up to 160°C  
- edges are welded
  
- Recommended tension - 2,5 kN/m
- Max. tensile loading - 4,0 kN/m
- 
  
- **Seams:**
- Spiral seam, easy to join
- Endless

Type	Air permeability		Weight g/m <sup>2</sup>	Thickness mm
	CFM (125 Pa)	m <sup>3</sup> /(m <sup>2</sup> · h) (100 Pa)		
42/06-AS	<b>850</b>	<b>13770</b>	<b>1400</b>	<b>2,5</b>