



Flatwire-Spiral fabric, filled

42-F-AS-Spezial-FP

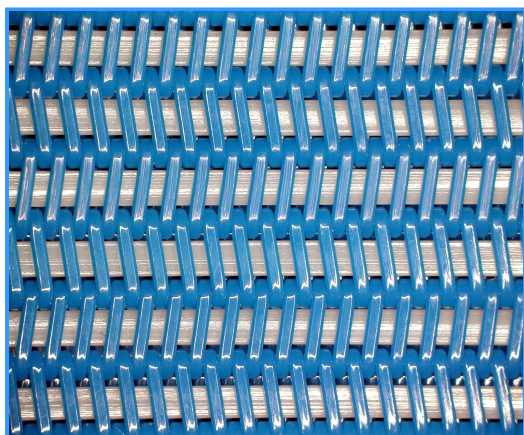

Application :

- Dryer fabric
- Conveyor belt
- Dryer belt
- Filter

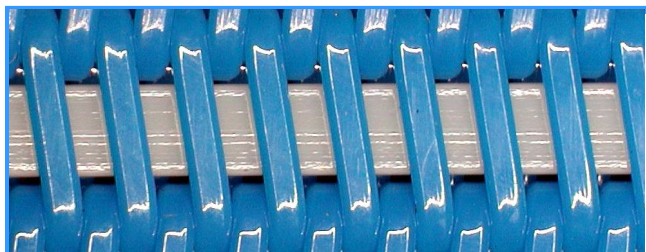

Characteristics:

- non marking surface
- very safe guiding conditions



Specifications

Technical data:

- Spiral fabric - 320 Spirals/m
- Spiral - PET monofil flat 0,35 x 0,7 mm
- Pintle wire - PET monofil 0,7 mm
- Filling - PET flat wire
- Edge sealing - heat resistance up to 160°C
- hydrolysis resistance
- edges are welded
- Recommended tension - 2,5 kN/m
- Max. tensile loading - 4,0 kN/m

■ Seams:

- Spiral seam, easy to join

Type	Air permeability		Weight g/m ²	Thickness mm
	CFM (125 Pa)	l/min (200 Pa)		
42-F-AS-Spezial-FP	250	950	1250	1,7