



## 42-F-AS

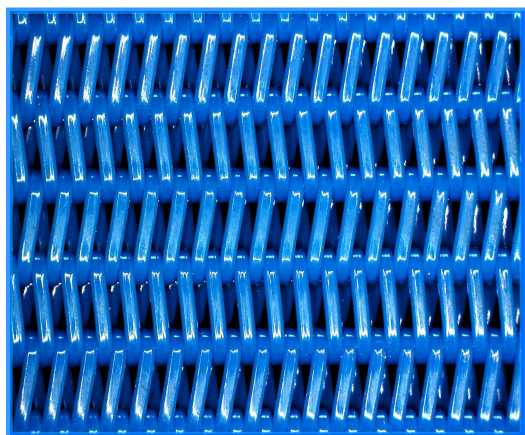

### Application :

- Dryer fabric
- Conveyor belt
- Filter

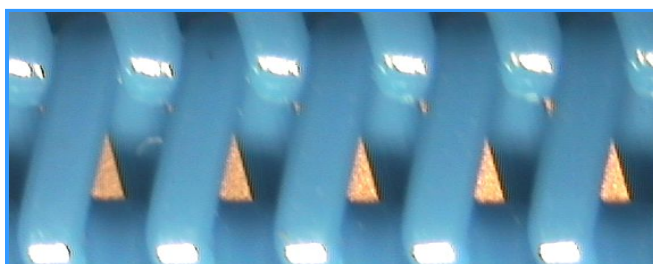

### Characteristics:

- good resistance to plugging
- non marking surface
- very safe guiding conditions



# Specifications

## Technical data:

- Spiral fabric - 320 Spirals/m
- Spiral - PET teflon flatmonofil
- Pintle wire - PET monofil 0,6 mm
- Edge sealing - heat resistance up to 180°C  
- hydrolysis resistance  
- edges are welded
  
- Recommended tension - 2,5 kN/m
- Max. tensile loading - 4,0 kN/m

## ■ Seams:

- Spiral seam, easy to join
- Endless

Type	Air permeability		Weight g/m <sup>2</sup>	Thickness Mm
	CFM (125 Pa)	m <sup>3</sup> /(m <sup>2</sup> · h) (100 Pa)		
<b>42-F-AS</b>	<b>750</b>	<b>12150</b>	<b>1000</b>	<b>1,7</b>