



# N 11 - RDC




2200mm\*4100mm / 2200mm\*5200mm  
2200mm\*4800mm / 2200mm\*5500mm



# N - SERIES Rotary Die Cutter



Automation




Efficiency



Computer Setup




Easy Maintenance



# N- SERIES

## Essential Features

- Smart Flexo for easy operation and maintenance.
- Consistent and quality boxes at fast speed.
- TCY SmartTech – PC & HMI based controls for easy operator use.
- Remote diagnostics via ethernet or phone.
- Available as a Rotary Die Cutter or Flexo Folder Gluer

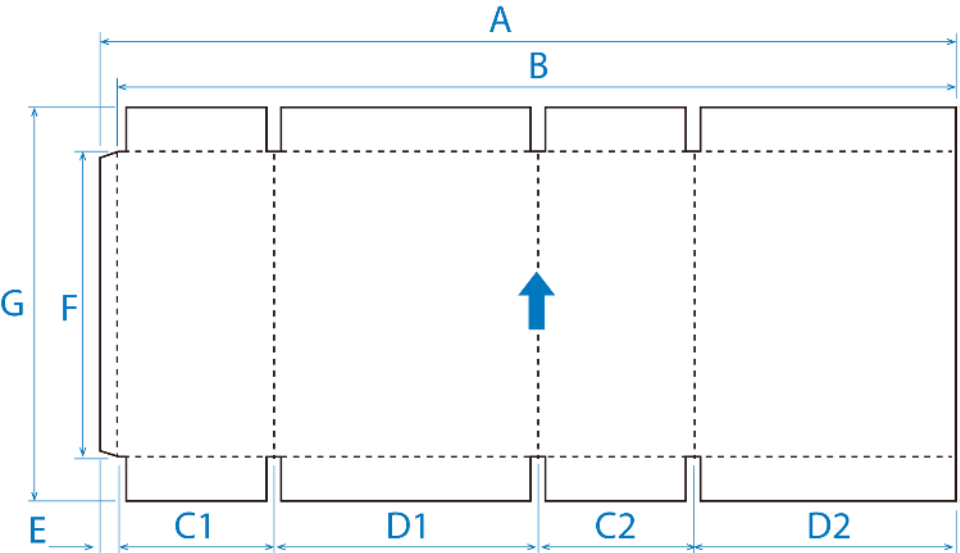


Bottom Print

| REF.  | Model No. : N11 (11PABN)<br>(BOTTOM PRINT) | FLEXO |      |
|-------|--|-------|------|
|       | Machine Size : 2200 X 5500 (MM)            | MIN.  | MAX. |
| A     | FINISHED BLANK<br>※ MAXIMUM FOR B+E        | 840   | 5500 |
| B     | PRINTING SURFACE LENGTH                    |       | 5400 |
| C1=C2 | PANEL(SMALL)                               | 85    | 2270 |
| D1=D2 | PANEL(LARGE)                               | 285   | 2470 |
| D1+C2 | TWO PANEL (SMALL+LARGE)                    | 370   | 2555 |
| E     | GLUE LAP WIDTH                             |       | 100  |
| F     | BOX HEIGHT                                 |       |      |
| G     | SHEET WIDTH (standard regular feed)        | 650   | 2092 |
|       | SHEET WIDTH (skip feed)                    |       | 2500 |
|       | MAX. MACHINE SPEED (SHEETS/MIN)            |       | 100  |






# FEEDER SECTION



A Rubber Pull Roll and a Metal Pull Roll Design to prevent sheet board crush

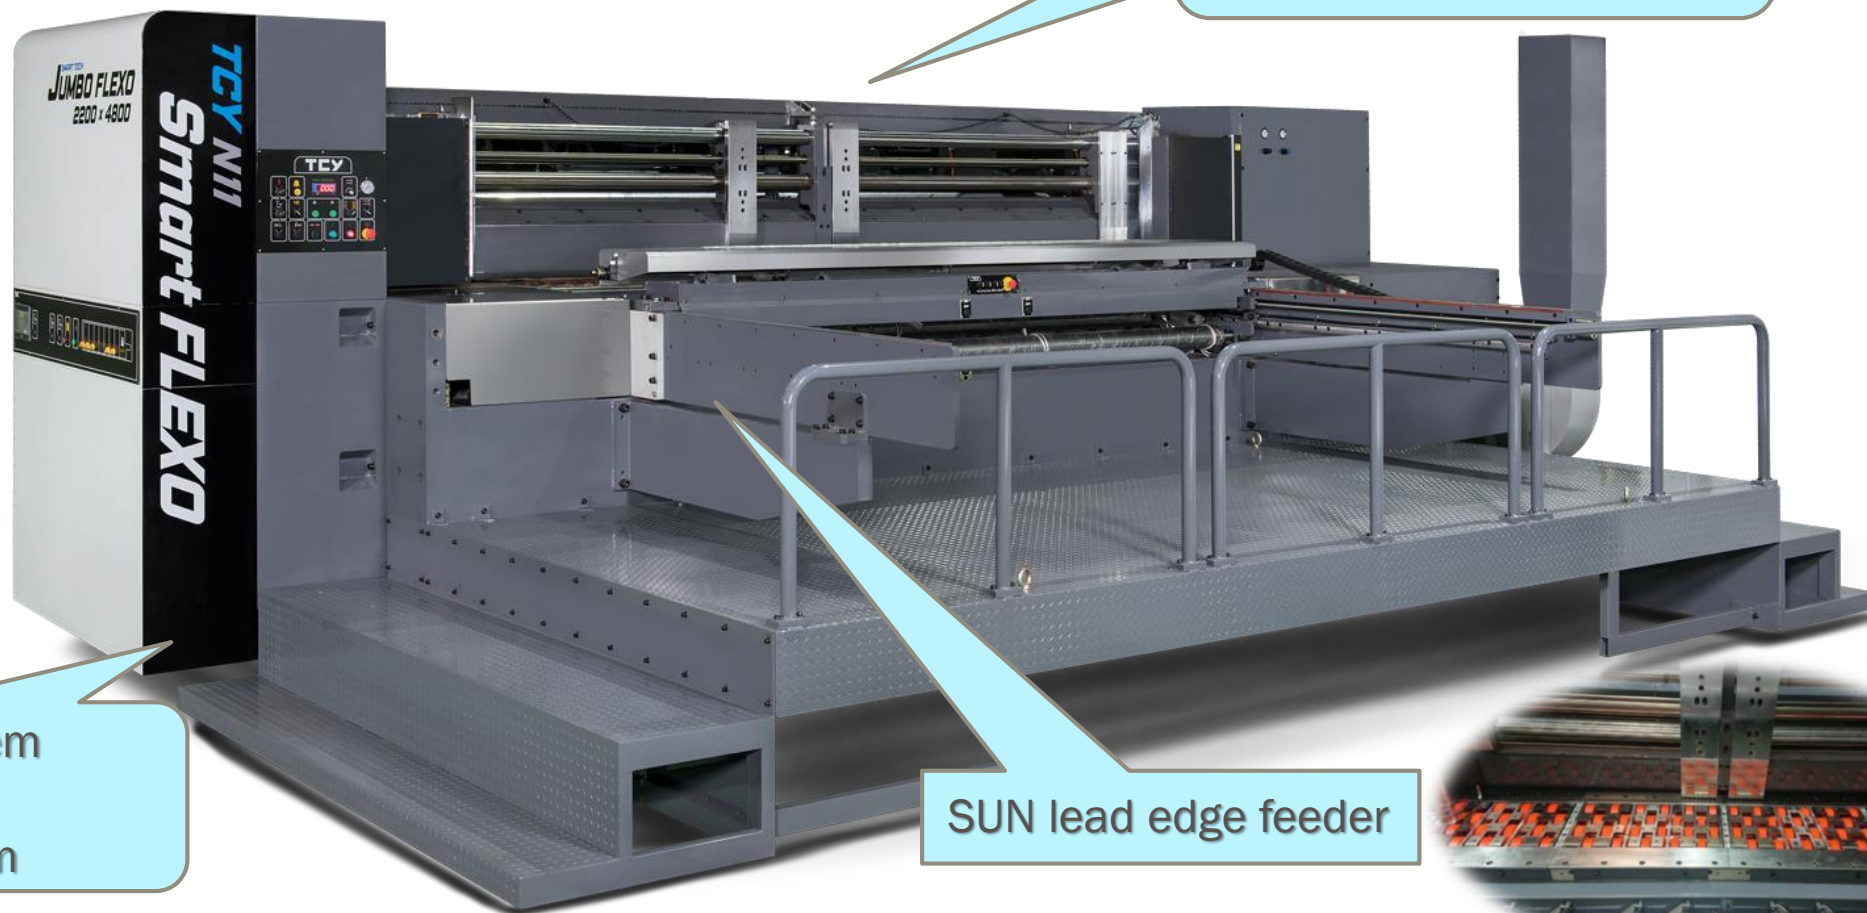


TCY SmartTech System  
Vacuum Gate System  
Jam-Up Detect System


SUN lead edge feeder




# PRINTER SECTION (BOTTOM)



# TWO INDEPENDENT CREASER SLOTTED SECTION



Dual slotter system



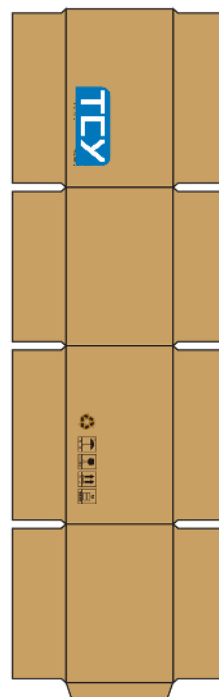


Creasing wheel is separated design for easy replacement






# TWO INDEPENDENT CREASER SLOTTED SECTION

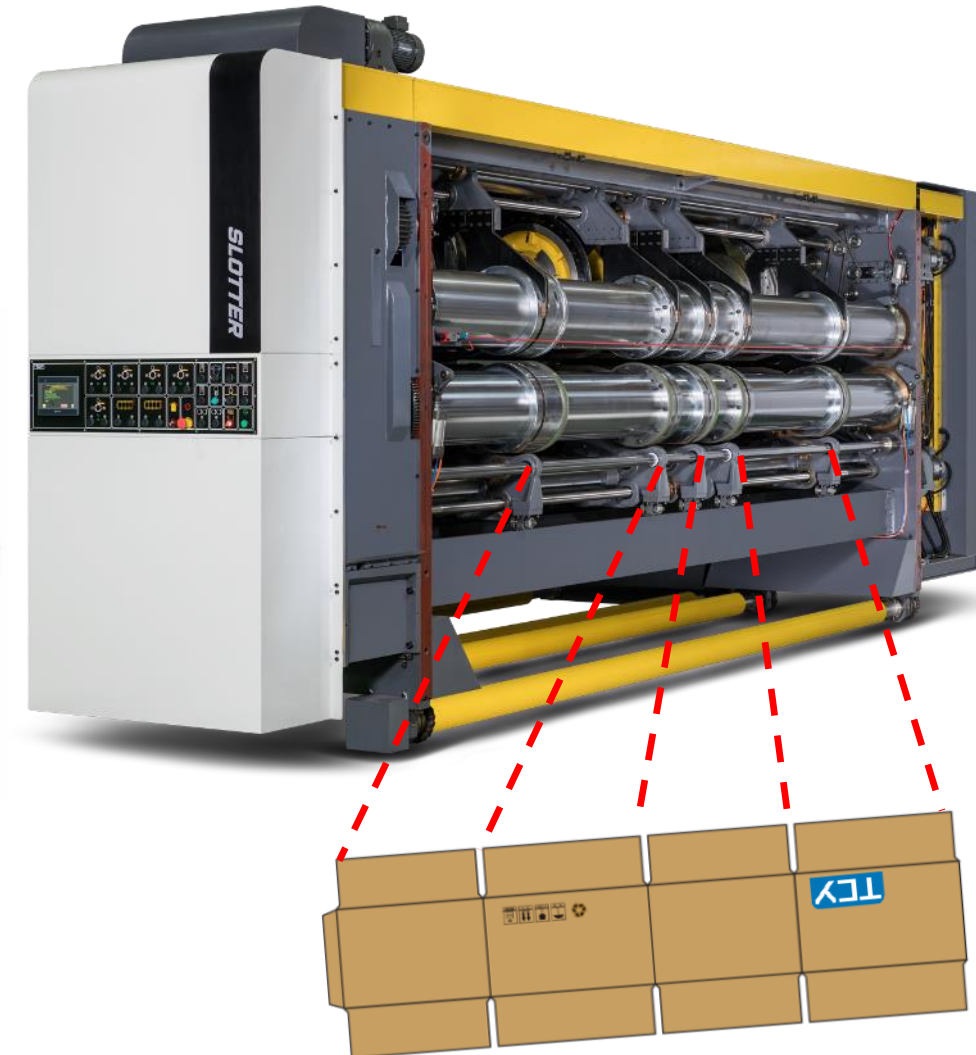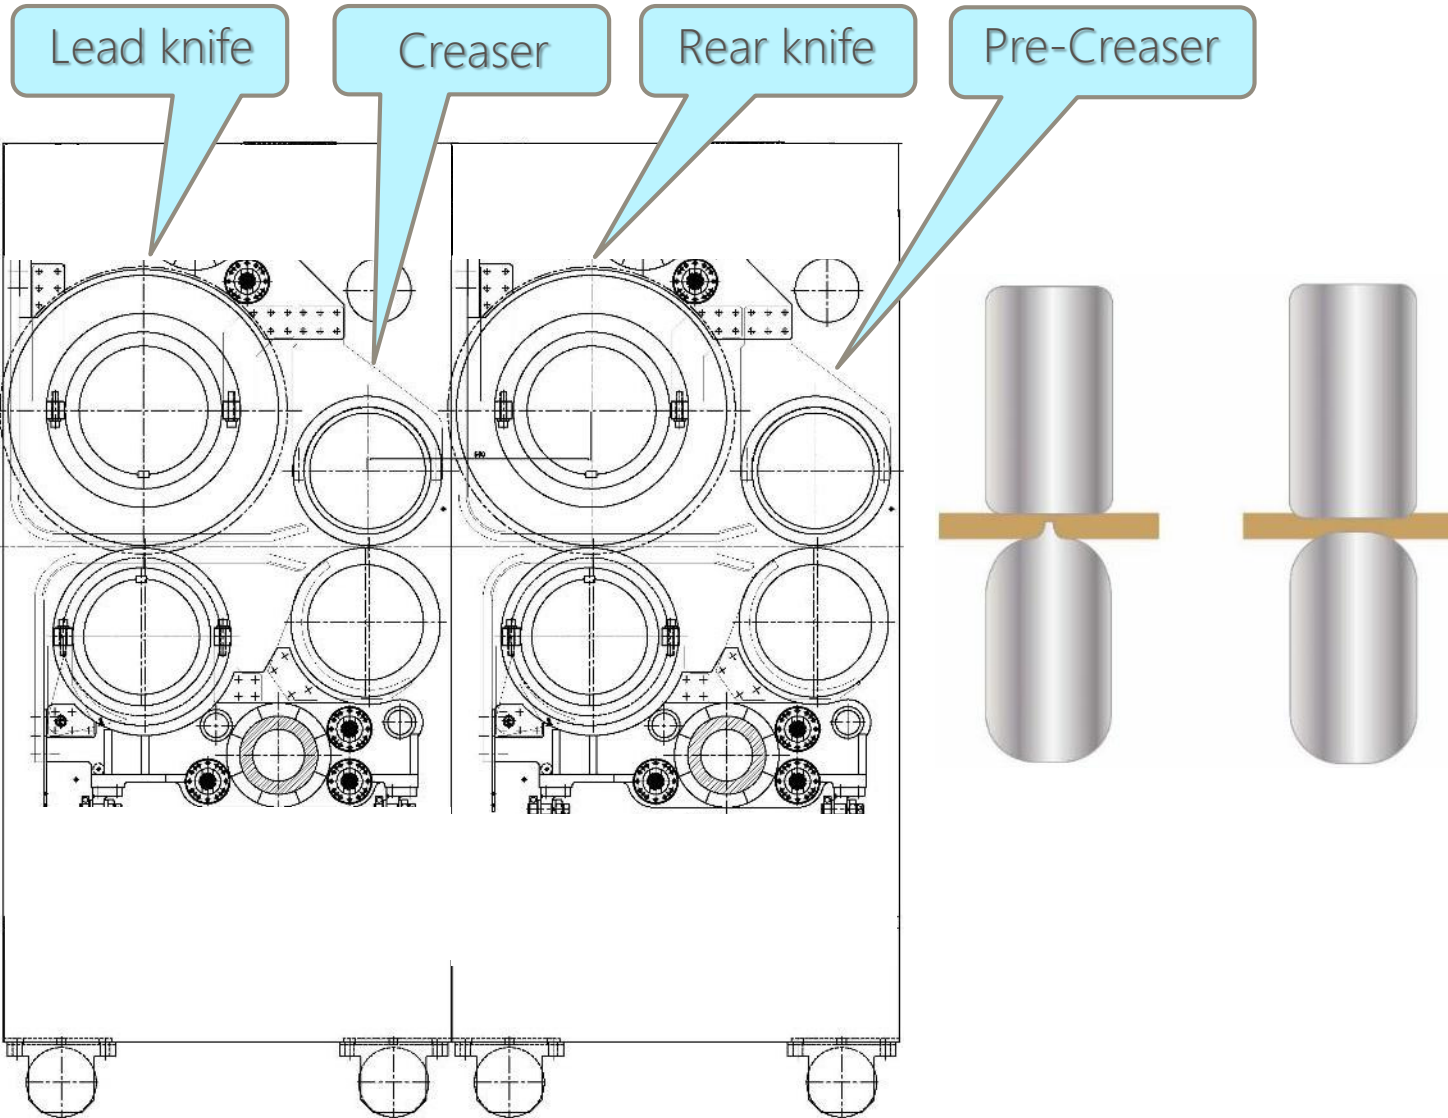



# ROTARY DIE CUTTER SECTION




(Optional)  
Anvil cover uses  
Equalizer

- Die Cut Drum made of Thick Wall steel tube, able to Reduce Vibration when running Heavy Duty Die Cut Job




# Counter Stacker Section



- Four support design auto stacker
- Dual section of front (up/down) & rear (fixed) belting conveyor
- Auto lifter for batch change with nonstop
- Hydraulic scissors type of lifter & motorized roller conveyor on top.
- Motorized side guides and back stop equipped with sparing device
- Suitable for bundle and batch pile use


# EASY MAINTENANCE DESIGN




Maintenance  
Request

- Remote connection service
- SmartTech Troubleshooting
- Maintenance Reminder





# TCY N-Series Value

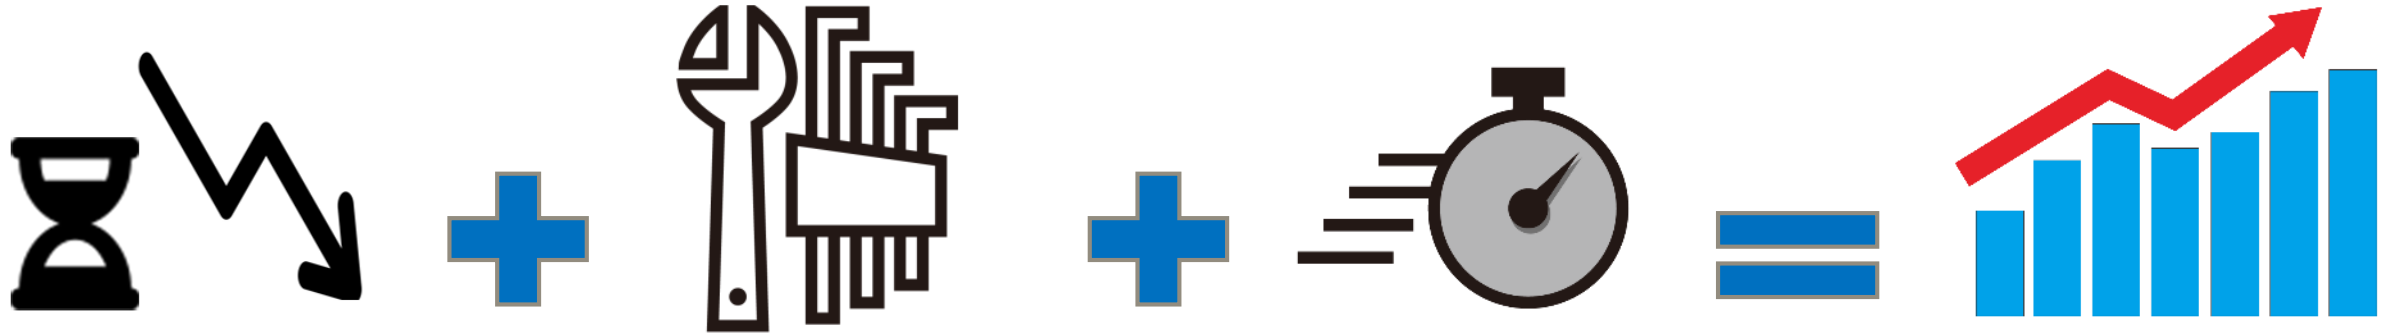

One Touch  
Reduce Setup Time

Easy Maintenance  
Reduce Cost

Speed Production

Efficiency UP



A bright spotlight beam shines down from the top center of the frame, creating a circular pool of light on the dark background. The beam is wider at the top and tapers slightly as it descends.

# TCY

TCY MACHINERY MFG. CO., LTD.