



Machine Lay-Out

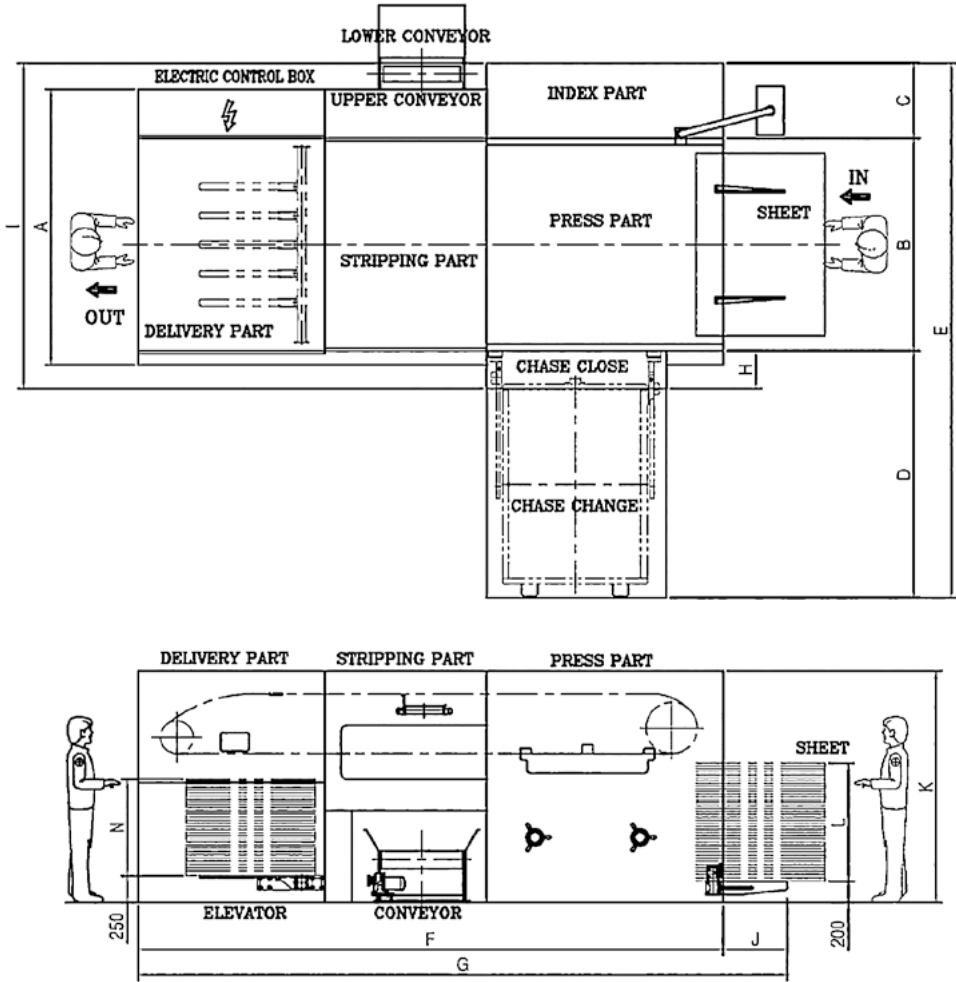

	WTNS-1300 S, SS	WTNS-1500 S, SS	WTNS-1700 S, SS	WTNS-1900 S, SS	WTNS-2100 S, SS	WTNS-2500 S, SS
A	2170	2370	2570	2832	3052	3660
B	1580	1780	1980	2220	2430	2970
C	700	700	700	770	850	800
D	1845	2025	2300	2600	2800	3280
E	4125	4505	4980	5570	6080	7050
F	4820	5090	5450	5910	6775	8300
G	5420	5690	6050	6790	7705	9445
H	350	350	350	430	480	480
I	2630	2830	3030	3420	3760	4310
J	600	600	600	880	930	1145
K	2100	2070	2160	2380	2485	2685

Top-Feeder Lay-Out

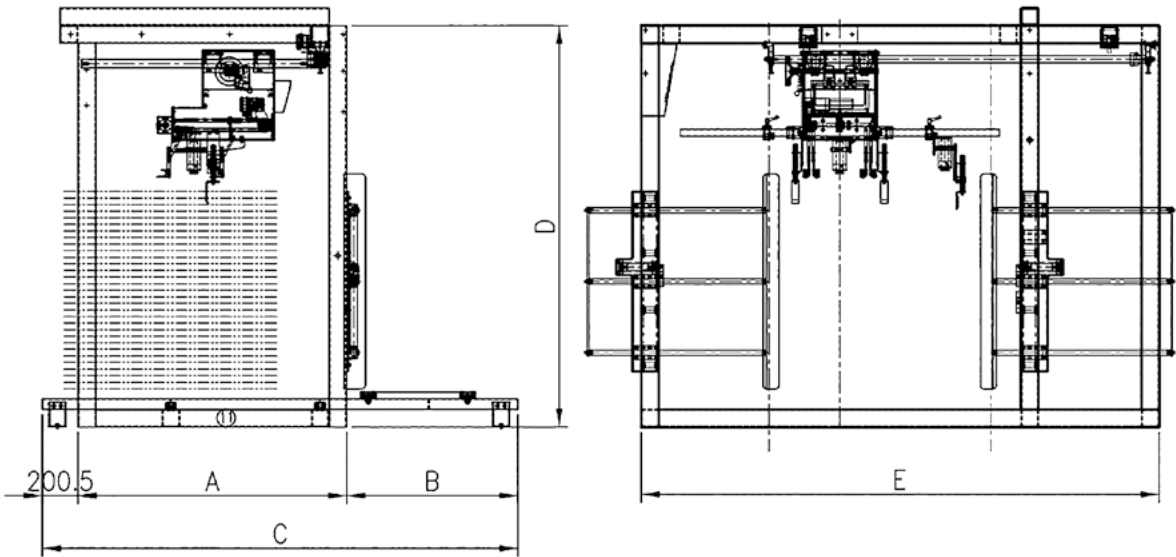

	WTNS-1300 S, SS	WTNS-1500 S, SS	WTNS-1700 S, SS	WTNS-1900 S, SS	WTNS-2100 S, SS	WTNS-2500 S, SS
A	1415	1515	1515	1615	1815	2015
B	845	945	945	1045	1145	1345
C	2480	2680	2680	2880	3180	3580
D	2160	2260	2260	2360	2460	2560
E	2420	2620	2920	3020	3220	3620



WOOKIL MACHINERY CO., LTD.

Head Office / Factory : #29, Sungju Nongkongdangi-gil, SungjuGun, Kyongbuk, 40033, Korea
Tel: +82-54-931-6162 / Fax: +82-54-931-6106
Email : wookil@wookil.co.kr

Seoul Office : #319, Siheungyutong Center 25Dong, Siheungdaero 97, GeumCheonggu, Seoul, 08639, Korea
Tel: +82-2-896-1285~6 / Fax: +82-2-892-0445

Busan Office : #301, Injero 39Bungil 58-4 3F, Kimhae, Kyongnam, 50929, Korea
Tel: +82-55-336-1221 / Fax: +82-55-336-1222

SEMI-AUTOMATIC
FLATBED DIE-CUTTER



WOOKIL MACHINERY CO., LTD.

SEMI-AUTOMATIC FLATBED DIECUTTER

FEEDING SECTION




- Easy Feeding for Wrapped and twisted Paper
- Precise Feeding by Front & Side Lay
- Easy to be fed at High Speed
- Possible Kiss Cutting
- 2 monitors to check sheet flow
- Possible to add Retractable Feeder(Optional)

DIECUTTERING SECTION




- Index Drive by Sankyo
- Quick Set Center Line System
- Air Ball System for cutting plate in & out easliy
- Easy Chase Order Change
- Cutting Pressure from 300 up to 500 tons according to machine size

STRIPPING SECTION

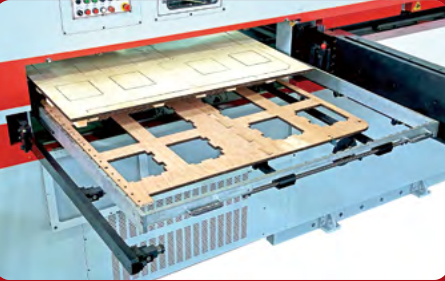

- Center Line System for Quick Set-Up
- Electric Clamp for Male Stripping Form
- Triple Action Stripping : Male, Female and Bottom Pin Stripping
- Scrap Conveyor

DELIVERY SECTION

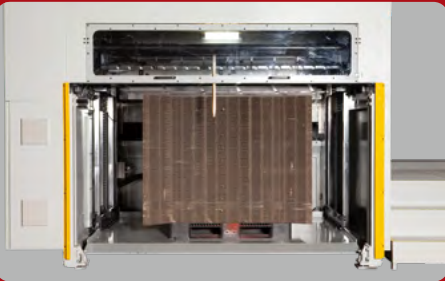

- High Pile Delivery System
- Tab Inserter for Counting
- Side & Front Jogger ensure Precise Stacking
- Other Type of Delivery is available

GRIPPER EDGE REMOVAL UNIT



- Possible 100% Stripping
- Save labor cost
- Increase productivity

SPECIFICATIONS

Model Specs	WTNS-1300 S, SS		WTNS-1500 S, SS		WTNS-1700 S, SS		WTNS-1900 S, SS		WTNS-2100 S, SS		WTNS-2500 S, SS	
Max. Sheet Size	1,000 X 1,300mm		1,100 X 1,500mm		1,200 X 1,700mm		1,300 X 1,900mm		1,500 X 2,100mm		1,700 X 2,500mm	
Min. Sheet Size	500 X 650mm		550 X 750mm		600 X 850mm		650 X 950mm		750 X 1,050mm		850 X 1,250mm	
Max.Cutting Size	980 X 1,280 mm		1,080 X 1,480 mm		1,180 X 1,680 mm		1,280 X 1,880 mm		1,480 X 1,980 mm		1,680 X 2,480 mm	
Min.Gripper Margin	10~15mm		10~15mm		10~15mm		10~15mm		10~20mm		10~20mm	
Cutting Pressure	300tons		350tons		400tons		450tons		500tons		550tons	
Max. Speed	4,500s/h		4,200s/h		4,000s/h		3,000s/h		2,100s/h		1,800s/h	
Sheet Thickness	1 ~ 10 mm, Corrugated Board, A, B, AB, E-Flute(15 mm special request)											
Total Weight	16.5tons(S)	19.5tons(PF)	19tons(S)	21tons(PF)	22tons(S)	25tons(PF)	30tons(S)	33tons(PF)	35tons(S)		56tons	
Electrical Power	11kw		14kw		18kw		24kw		29kw		35kw	



OPTION



- Chase-Make-Ready Table



- Retractable Feeder



- Heat Device for Plastic Board