

Technical Specifications

Dimensions (L*W*H)		Glory 1604 : 12.8 x 5.7 x 2.3 m Glory 1604 + Dryer: 21.9 x 5.7 x 2.6 m Glory 1604 + Dryer + Varnish: 23.9 x 5.7 x 2.6 m			
Productivity		Linear speed up to 150 m/min			
Substrate/Handling (W*L)		Types: Wide range of corrugated boards (coated, white, kraftetc.) Max. board size: 1600 x 2800 mm Mini. board size: 450 x 400 mm Thickness: 1.5-11 mm Handling: Lead-edge feeder, precise media positioning, vacuum suction, conveyor belt; All designed for reliable and high-quality printing.			
Printing		Technology: Single-pass, drop-on-demand, piezo inkjet technology. Print head: Industrial inkjet print heads with piezo technology (max.14 pcs per color) Width: Max. printing width 1510 mm Ink type : Han FullColor®aqueous ink Ink color : Cyan, Magenta, Yellow, Black(CMYK) Drying: Infrared drying system			
Printing Modes	Resolution	600 x 400	600 x 600	600 x 900	600 x 1200
	Linear Speed	150 m/min	100 m/min	66 m/min	50 m/min
RIP		Software: 3rd party RIP Software Input formats: PDF,EPS, TIFF, JPEG and AI etc. Provide color solutions for various printing substrates			
Features		Warp detecting and warning system Automatic ink cost calculating function Remote defect diagnosis & system upgrades Production management system available			
Operating environment		Temperature: 22° to 30°C Humidity: 40%-80% RH (non-condensing) Power supply: AC380V 3P+PE 50/60Hz Air supply: 6 bar (85 Psi) to 8.4 bar (120 Psi)			
Total Power		In Actual Production (Reference Only)			
		Glory1604 (preprint unit optional included) : 158 Kw (Dryer 75 kw included)		64 Kw	
		Glory1604 (brush roller optional included) : 141 Kw (Dryer 60 kw included)		64 Kw	
		Tunnel Dryer: 193 Kw (Dryer 144 kw included)		131 Kw	
		varnishing Unit: 77 Kw (Dryer 60 kw included)		62 Kw	
Weight		Glory1604 (preprint unit optional included) : 17.5 T Glory1604 (brush roller optional included): 16.6 T Tunnel Dryer: 11.6 T Varnishing Unit: 3.8 T			



Glory 1604

Single-pass Corrugated Digital Inkjet Press



Shenzhen HANWAY Industrial Digital Equipment Co.,Ltd.
Add: The Third Factory, NO.322 Yuanhu Road, Longgang District
Shenzhen China.
Tel: +86 0755-29375889
Fax: +86 0755-23217841
E-mail:info-hanway@hanglorygroup.com
Http://www.hanway-print.com



Glory 1604


- Industrial robust design with the fastest production speed up to 150 m/min and High-Flexo like print quality.
- Digital printing technology brings you the experience of instantaneous response and seamless switch among multiple short-run orders.
- Applicable to all kinds of substrates including Kraft, Mottled White and Coated White.
- Water-based ink costs less and supports the wide range of packaging applications.




Lower ink consumption



Image Dimension:569 x 373 mm
Image Pixel:13440 x 8808
Resolution:600 x 600 dpi

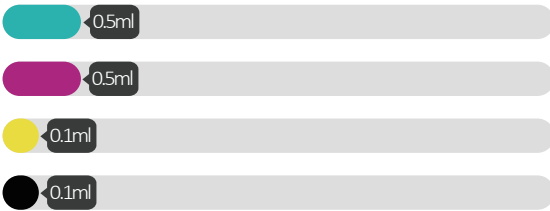

Better Graphic Designs

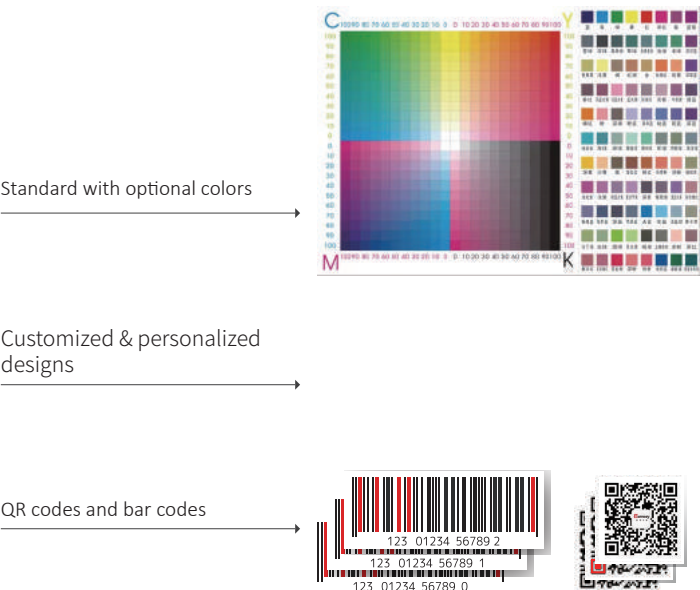

Higher Printing Quality



As high as 1200dpi in resolution, attributed to high-performance Kyocera printheads.

Quicker Job Changeover

